




## AK RUBBER ANCHOR MAT

Anti-Vibration rubber pads available in either Natural Rubber (NR) or Nitrile Rubber (NBR).

Natural Rubber (NR) for general purpose applications.

Nitrile Rubber (NBR) for applications where oil resistance is required.

The matting has 5mm wide ribs which are at 90 degrees on the surface and the underside of the mat allowing a better friction ratio compared to other mats.

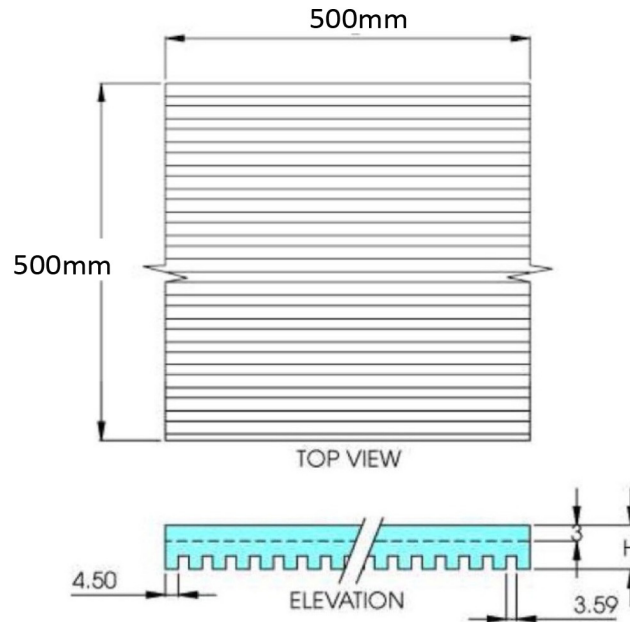

### Technical Properties (Summary)

<b>Material:</b>	NR / NBR	
<b>Colour:</b>	Black	
<b>Density [specific gravity]:</b>	1.08	
<b>Hardness [Degress Shore A]:</b>	50° ± 5°	
<b>Tensile Strength [Mpa]:</b>	3.4	
<b>Elongation at Break [%]:</b>	270%	
<b>Max Pressure [Kg/cm<sup>2</sup>]:</b>	1.5 Kg/cm <sup>2</sup> for 10mm Thickness	2.0 Kg/cm <sup>2</sup> for 8mm Thickness
<b>Min. Temperature [°C]:</b>	-10 (avoid prolonged exposure)	
<b>Max Temperature [°C]:</b>	+70 (avoid prolonged exposure)	